


Fig. 615 Dimensions


Fig. 615 DN40 to DN600 dimensions

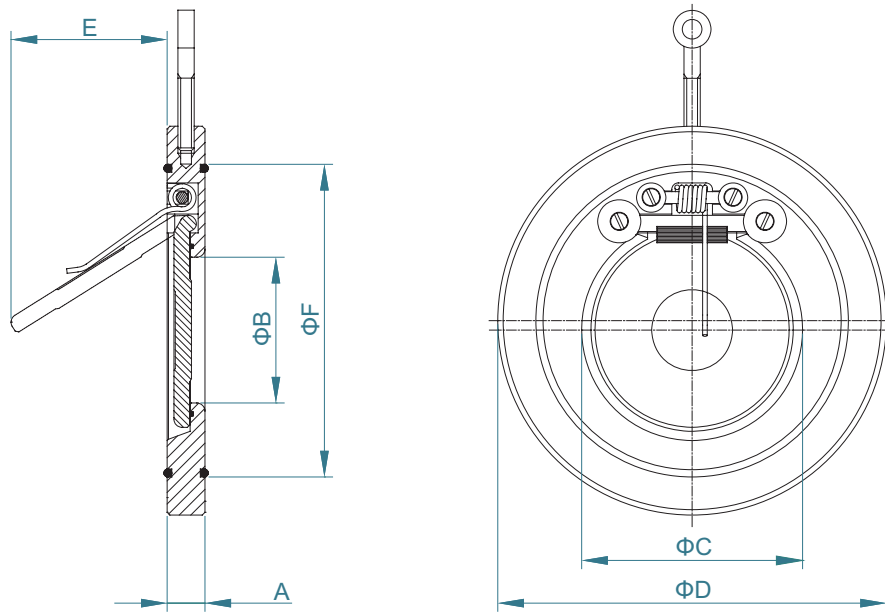

SIZE		A	B	C	D					E	F	Weight [kg]
DN	INCH				PN10	PN16	PN25	PN40	CLASS150			
DN40	1 1/2"	14	22	39	94	94	94	94	85.7	25	76.2	0.9
DN50	2"	14	32	48	109	109	109	109	104.8	37	86.2	1.1
DN65	2 1/2"	14	40	59	129	129	129	129	123.8	50	107.2	1.5
DN80	3"	14	54	76	144	144	144	144	136.5	61	121.2	1.8
DN100	4"	18	70	96	164	164	170	170	174.6	77	146.2	3.0
DN125	5"	18	92	115	194	194	196		196.8	94	175	3.4
DN150	6"	20	112	138	220	220	226		222.2	100	199.2	5.4
DN200	8"	22	154	183	275	275	286		279.4	152	255.2	7.7
DN250	10"	26	200	232	330	330	343		339.7	180	316.2	13.2
DN300	12"	32	240	272	380	386	403		409.5	215	361.2	23.3
DN350	14"	38	269	305	440	446	460		450.9	245	402.4	38
DN400	16"	44	308	349	491	498	517		514.4	285	454.4	52.5
DN450	18"	50	360	398.6	541	558	567		549.3	335	512	76.3
DN500	20"	56	405	445.4	596	620	627		606.4	398	575.2	98.5
DN600	24"	62	486	529	698	737	734		717.5	453	678	136

Pressure loss

Pressure loss chart

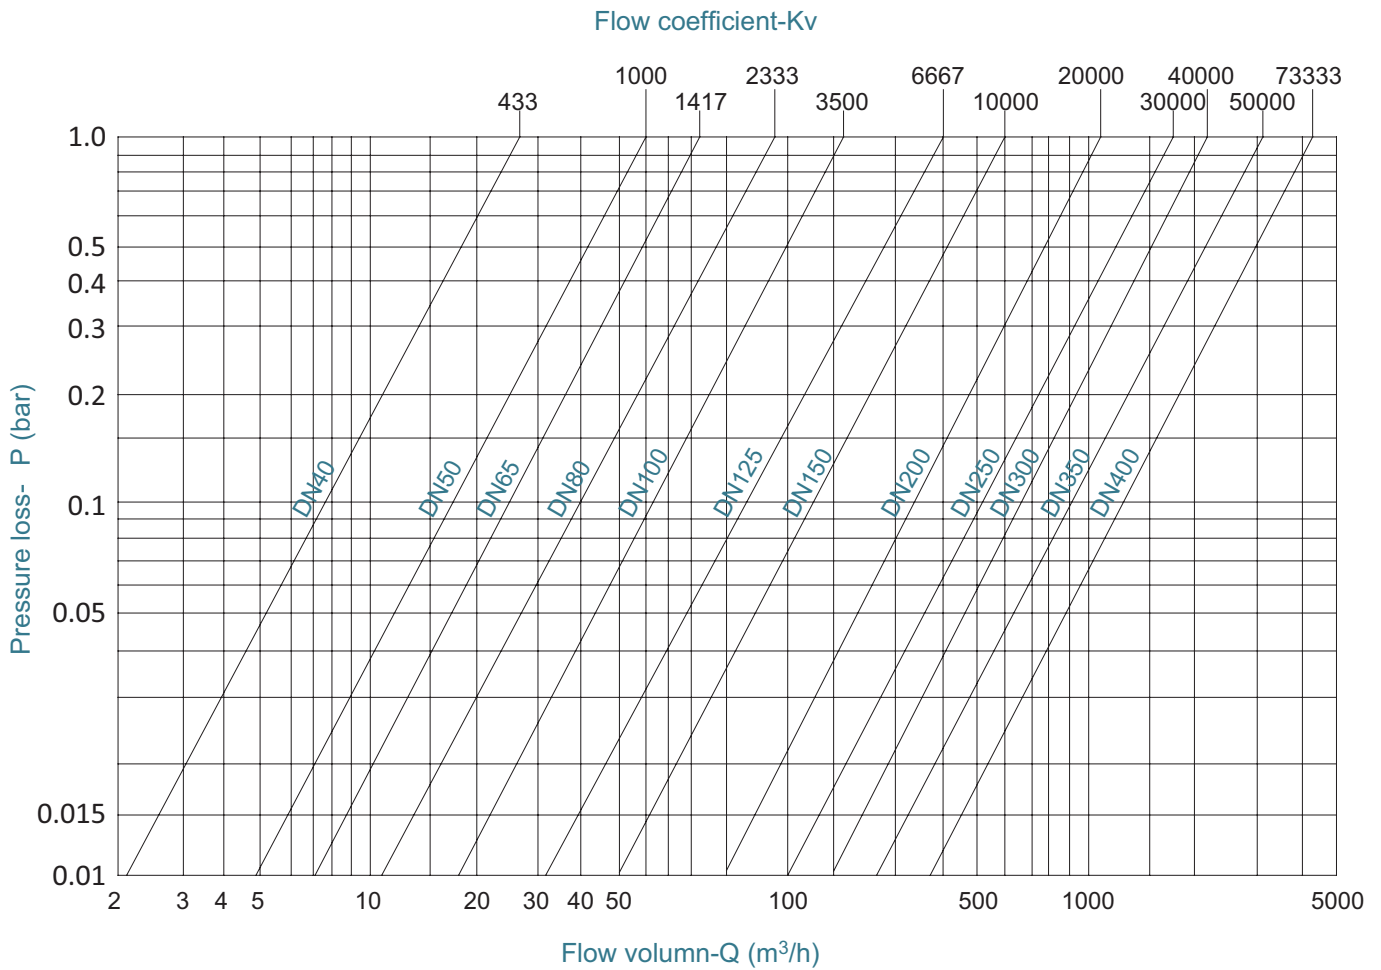

This chart shows the pressure loss- P over the flow volumn- Q .

The flow coefficient - K_v can be calculated according to the below formula:

Liquid:

$$K_v = Q \cdot \sqrt{\frac{W}{\Delta P}}$$

Gas:

$$K_v = \frac{V_N}{514} \cdot \sqrt{\frac{G \cdot T}{\Delta P \cdot P_d}}$$


- K_v : Flow coefficient
- Q : Maximum flow volumn, m³/h
- W : Exact weight, kg/m³
- P : Pressure loss, bar
- V_N : Maximum flow, Nm³/h
- G : Exact weight, kg/Nm³
- T : Absolute temperature, Kelvin
- P_d : Absolute pressure downstream, bar

Opening pressure and pressure temperature rating

Opening pressure—zero flow differential pressure(mbar)


SIZE		614 Without spring		615 With spring	
DN	INCH	Horizontal flow	Vertical flow	Horizontal flow	Vertical flow
DN40	1 1/2"	0.3	5	7	12
DN50	2"	0.3	5	7	12
DN65	2 1/2"	0.3	7	7	14
DN80	3"	0.3	10	7	17
DN100	4"	0.3	12	8	20
DN125	5"	0.3	12	8	20
DN150	6"	0.3	18	8	26
DN200	8"	0.3	20	8	28
DN250	10"	0.3	20	8	28
DN300	12"	0.3	25	8	33
DN350	14"	0.3	25	9	34
DN400	16"	0.3	25	9	34
DN450	18"	0.3	30	9	39
DN500	20"	0.3	30	9	39
DN600	24"	0.3	35	9	44
DN700	28"	0.3	35		
DN800	32"	0.3	35		
DN900	36"	0.3	40		
DN1000	40"	0.3	45		

Pressure temperature curve

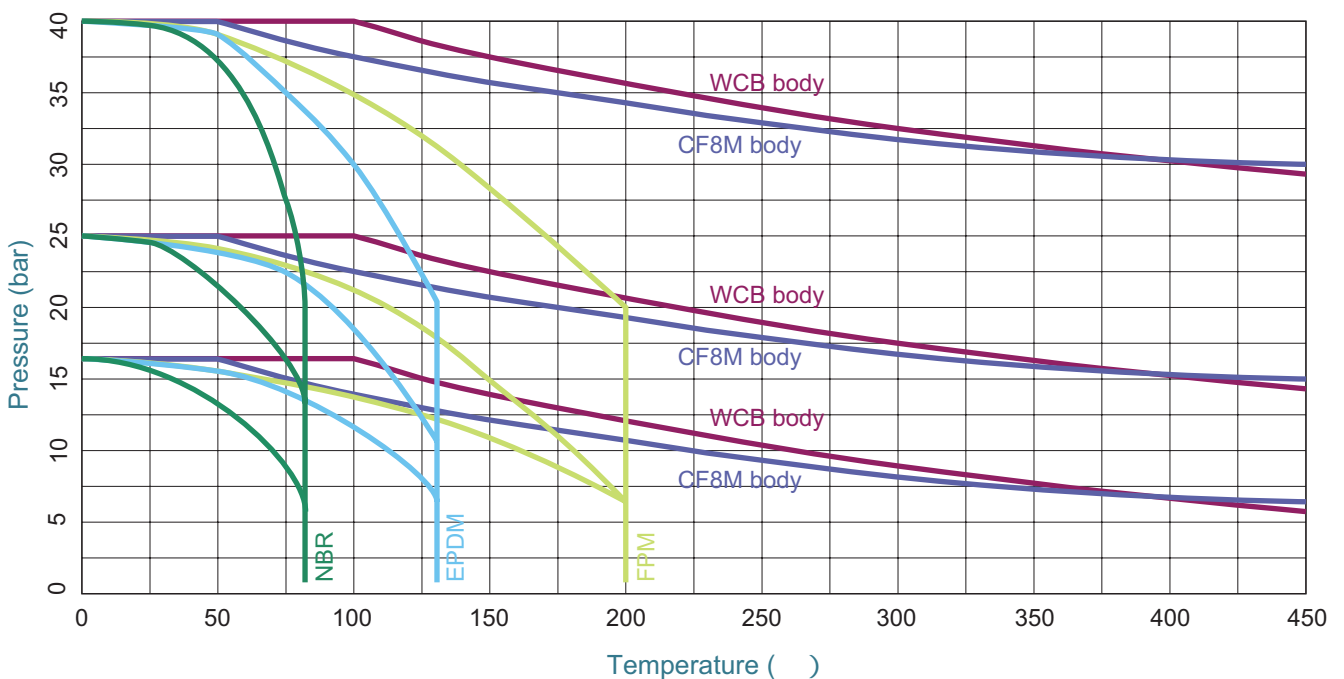

Part list and chart for medium resistance

Fig. 615

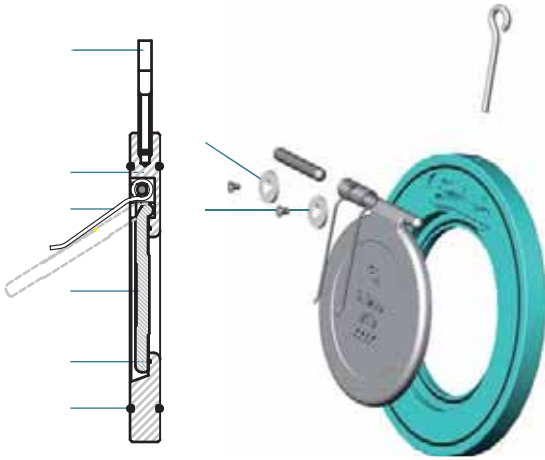

No.	Part name	Description	Material	No.	Part name	Description	Material
1	Eye bolt	Stainless steel	SS316	5	Seat	-20°C~85°C	NBR
			SS304			-30°C~145°C	EPDM
2	O-ring	Same as seat	Same as seat			-20°C~200°C	FPM
3	Body	Steel	Zinc plated			-40°C~200°C	PTFE
		Stainless steel	SS316			-40°C~450°C	Same as body
			SS304				
		Aluminum bronze	C95800				
4	Disc	Stainless steel	C95400			6	Washer
			SS316	SS304	7	Screw	Stainless steel
4	Disc	Stainless steel	SS316	8	Spring	Stainless steel	SS321
			SS304				SS304
			SS201				Alloy steel
		Aluminum bronze	C95800				
			C95400				

Chart for medium resistance

Liner	Suitable for	Unsuitable for
EPDM	Water, steam, alcohol, glycol, caustic soda, ozone, food products, glycerine, milk, oxygen, air, saturated salt, iron chloride, gelatine, dry hydrogen sulphide, potassium chloride, sodium, magnesium chloride	Mineral oil, chlorine compounds, ketones, acetyl, chloride, asphalt, bromine, butane, butyl, petrol, diesel oil, acid, fish oil, freon, chlorine, natural gas, exhaust gas, nitric acid
NBR	Mineral oil, grease, air, seawater, gas, boric acid, aluminium chloride, ammonia gas, citric acid, diesel oil, fish oil, petrol, gelatine, glycerine, magnesium chloride, lactic acid, linseed oil, natural gas	Ozone, acetone, aniline, chlorine dioxide, chromic acid, phenol, ethyl acetate, freon 21+22+23, hot nitric acid, styrene, hydrogen sulphide, isopropyl acetate, oxygen, sulphuric acid
FPM	Oil, mineral acid, grease, phosphorus, tannic acid, gelatine, glycol, oxygen, slaked lime, carbon acid, natural gas, pulp, salt, sugar, sulphur	Hot water, steam, ketone, ammonia gas, acetone, formaldehyde, cellulose acetate, freon, urea, ethanoic acid, methyl
FPM-B	Acid, alkali, amine hot water, steam	Gasoline, naphtha, hydrocarbon solvent, chlorine solvent
PTFE	Resistance to almost any medium	Molten alkali metals, chlorine trifluoride, Chlorine pentafluoride, liquid fluorine
Metal	According to body/disc material	According to body/disc material

General applications and specifications

General applications

Petrochemical
Marine
Offshore
Heating
Water
Fire protection

Specifications

Nominal diameter:	DN40-DN1000
Standard differential pressure:	16bar for DN40-DN200, 10bar for DN250-DN1000
Maximum differential pressure:	40bar for DN40-DN100 25bar for DN125-DN600 16bar for DN700-DN1000
Opening pressure:	7mbar for horizontal installation 12~44mbar for vertical installation
Flange accommodation:	EN1092-1 PN10/PN16/PN25/PN40, ASME B16.5 CLASS150
Face to face:	Industrial standard
Temperature range:	-40°C to +450°C (depending on pressure, medium and material)
Tightness test:	Rubber seated: ISO 5208 Rate A, API 598 Table 6 Metal seated: ISO 5208 Rate D, API 598 Table 6



The check valves meet the safety requirements of the Pressure Equipments Directive 97/23/EC (PED) appendix 1 for fluids of the groups 1 and 2.