


CV




Imperial

VALVE

ORING CHECK VALVE 10000 psi series

FLOW 

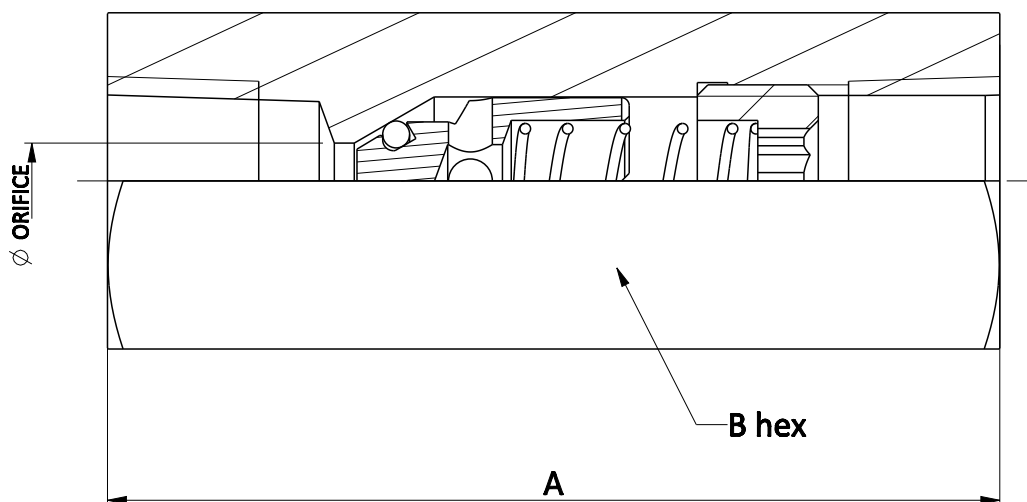

ORDER CODE	CONNECTIONS Inlet/outlet	A mm (inch)	B mm (inch)	ORIFICE mm (inch)	MATERIAL	ORING MATERIAL
S10CF44S-V-NA	1/4" NPT	59.0 (2.323)	22.23 (0.875)	5.00 (0.197)	AISI 316L	VITON 90 Sh A
S10CF66S-V-NA	3/8" NPT	64.0 (2.520)	22.23 (0.875)	6.00 (0.236)	AISI 316L	VITON 90 Sh A
S10CF88S-V-NA	1/2" NPT	76.0 (2.992)	30.16 (1.187)	10.00 (0.394)	AISI 316L	VITON 90 Sh A
S10CF1212S-V-NA	3/4" NPT	85.0 (3.346)	34.93 (1.375)	10.00 (0.394)	AISI 316L	VITON 90 Sh A
S10CF1616S-V-NA	1" NPT	95.0 (3.740)	44.45 (1.750)	10.00 (0.394)	AISI 316L	VITON 90 Sh A

Standard cracking pressure: 20 psi (1.38 bar) $\pm$ 30%