

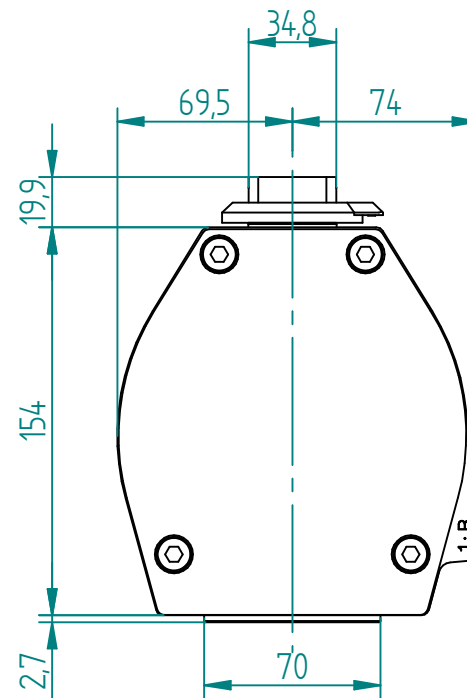
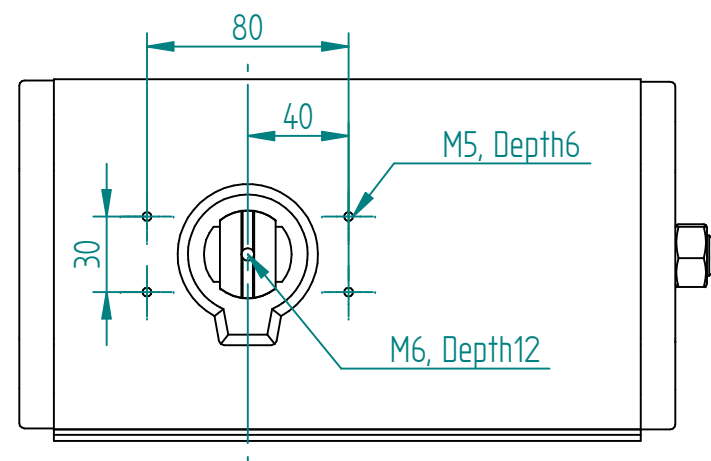
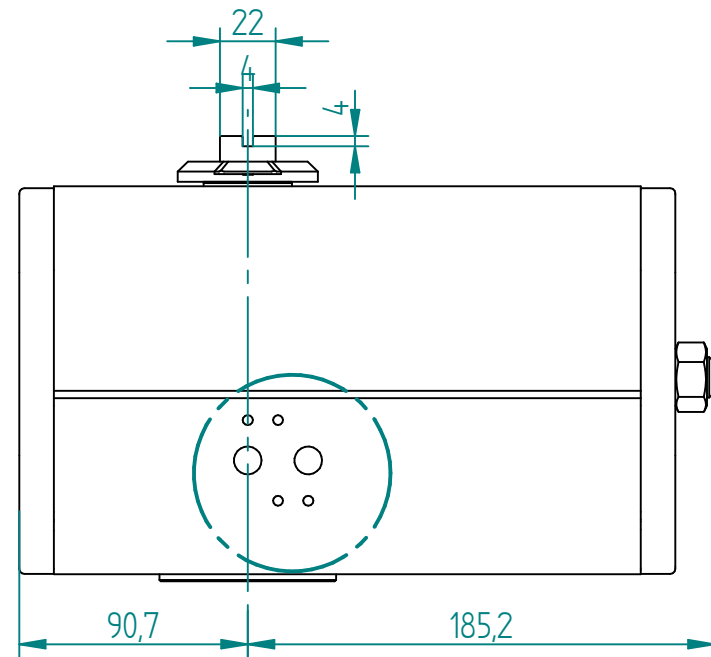


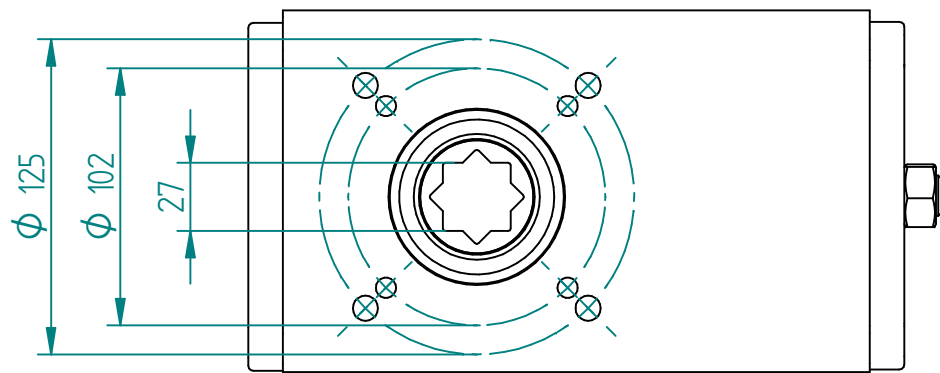


Function	Position 0°=closed 90°=open	2,1 bar 30 psi	2,8 bar 40 psi	3,5 bar 50 psi	4,2 bar 60 psi	4,5 bar 65 psi	5,5 bar 80 psi	6 bar 87 psi	7 bar 100 psi
Air	0°	150	200	250	300	321	413	450	530
Air	60°	75	100	125	150	161	206	225	260
Air	90°	108	143	179	215	230	293	320	380

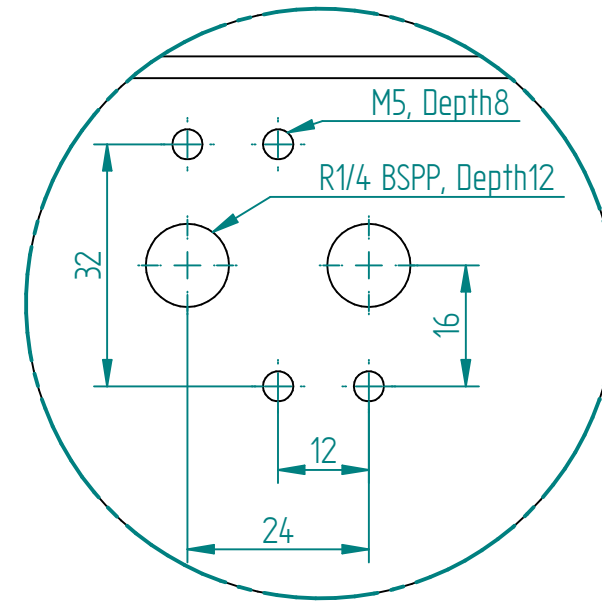

DETAIL A 1:1

Hole pattern for solenoid valves acc.
to VDI/VDE 3845, NAMUR

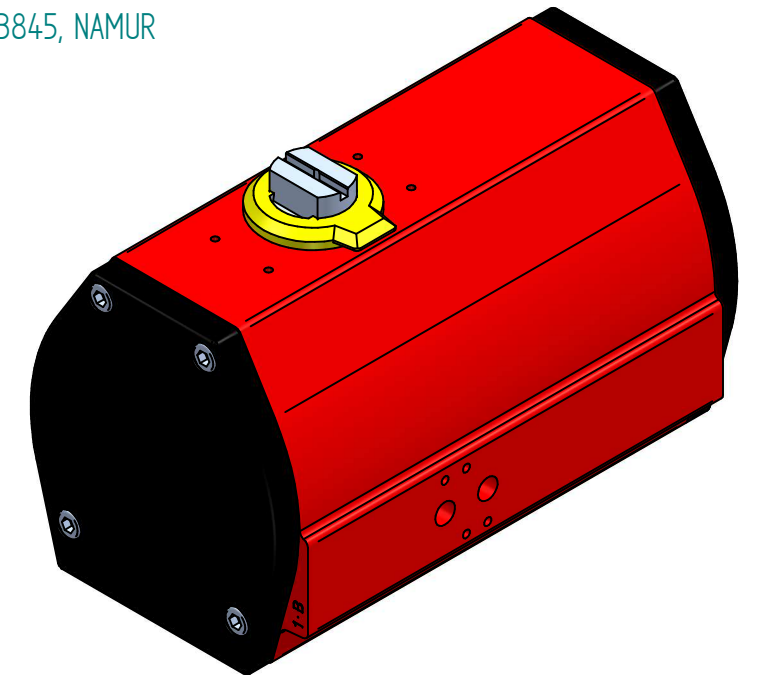

		NAME	DATE	SIZE	DWG NO		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE +/-0,5
	DRAWN	MOTO	13.06.2014	A3	REM00005D		
	CHECKED	TOCO	dd.mm.yyyy	FILE NAME: REM00005D.dft			
TITLE PNEUMATIC DOUBLE ACTING ACTUATOR RC250 DAHT	ENG APPR	TOCO	dd.mm.yyyy	SCALE: 1:3		REV:	
	MGR APPR	TOCO	dd.mm.yyyy	WEIGHT:		SHEET: 1 OF 1	

REV	DESCRIPTION	DATE	APPROVED
REVISION HISTORY			