

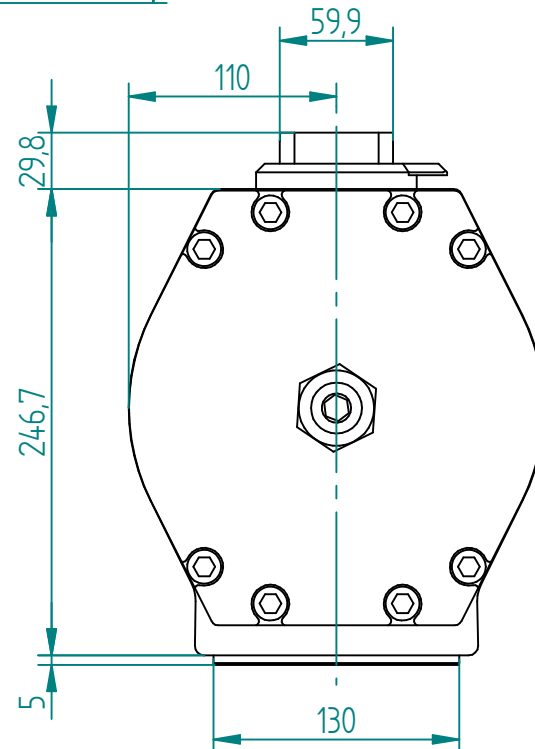
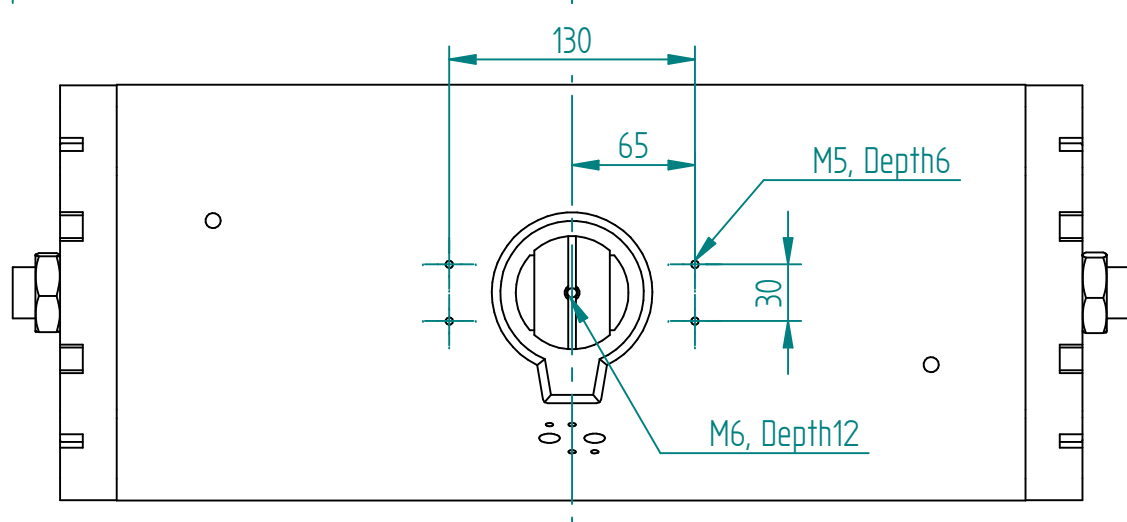
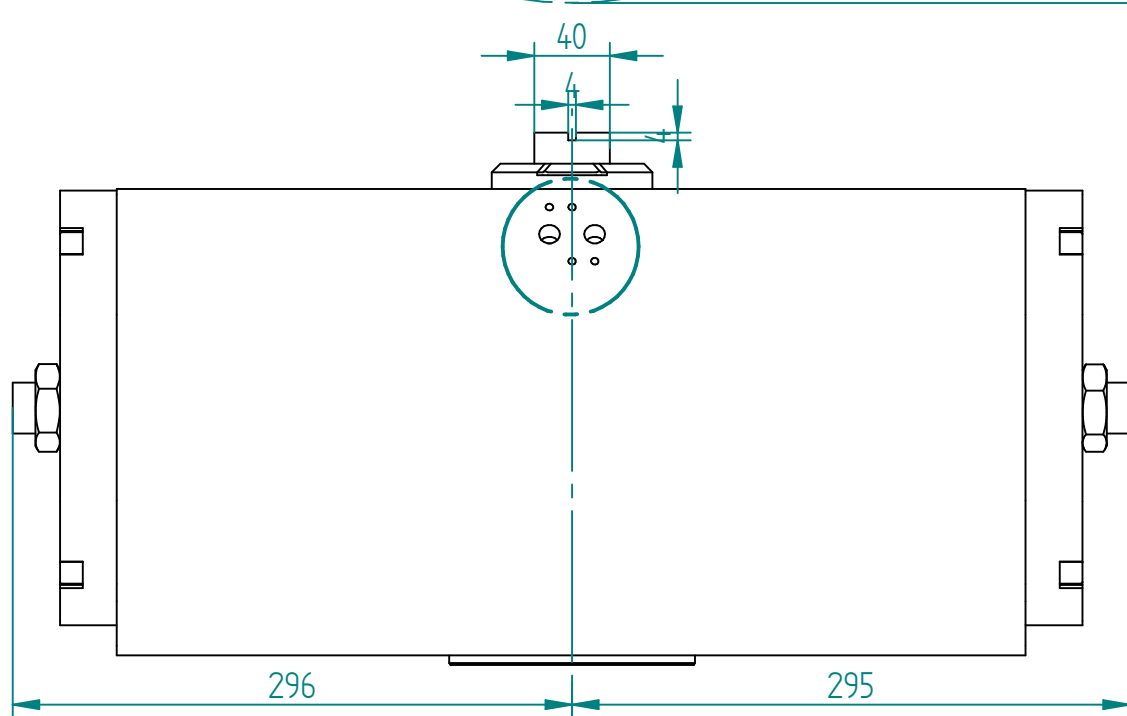


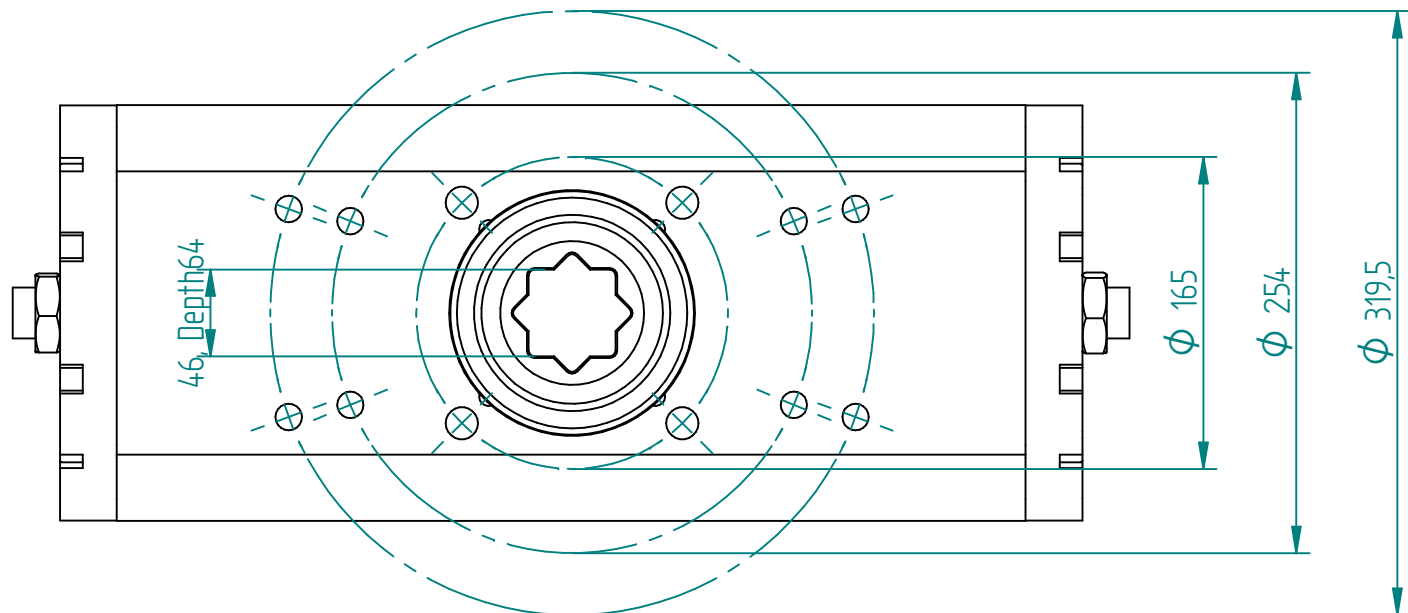


Function	Position 0°=closed 90°=open	2,1 bar 30 psi	2,8 bar 40 psi	3,5 bar 50 psi	4,2 bar 60 psi	4,5 bar 65 psi	5,5 bar 80 psi	6 bar 87 psi	7 bar 100 psi
Air	0°	1270	1693	2117	2540	2721	3483	3800	4450
Air	60°	635	847	1058	1270	1361	1742	1900	2220
Air	90°	915	1220	1525	1830	1961	2512	2740	3190

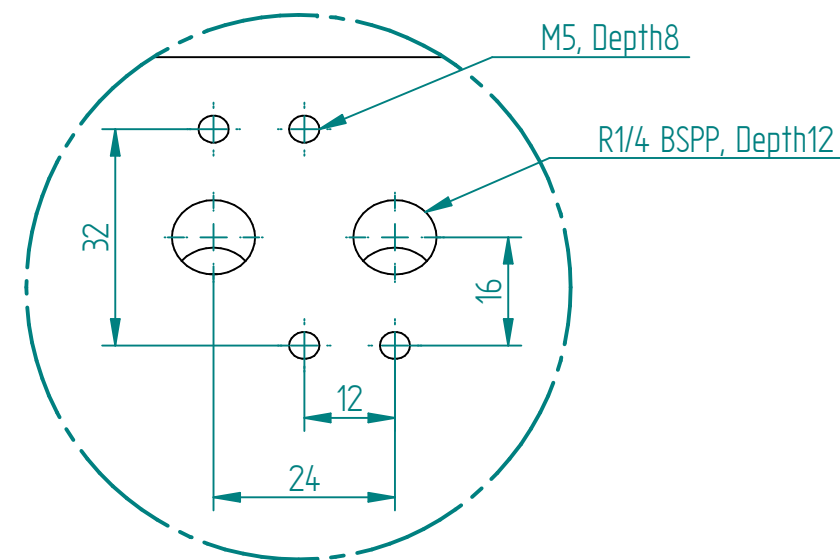

DETAIL A 1:1

Hole pattern for solenoid valves acc.
to VDI/VDE 3845, NAMUR

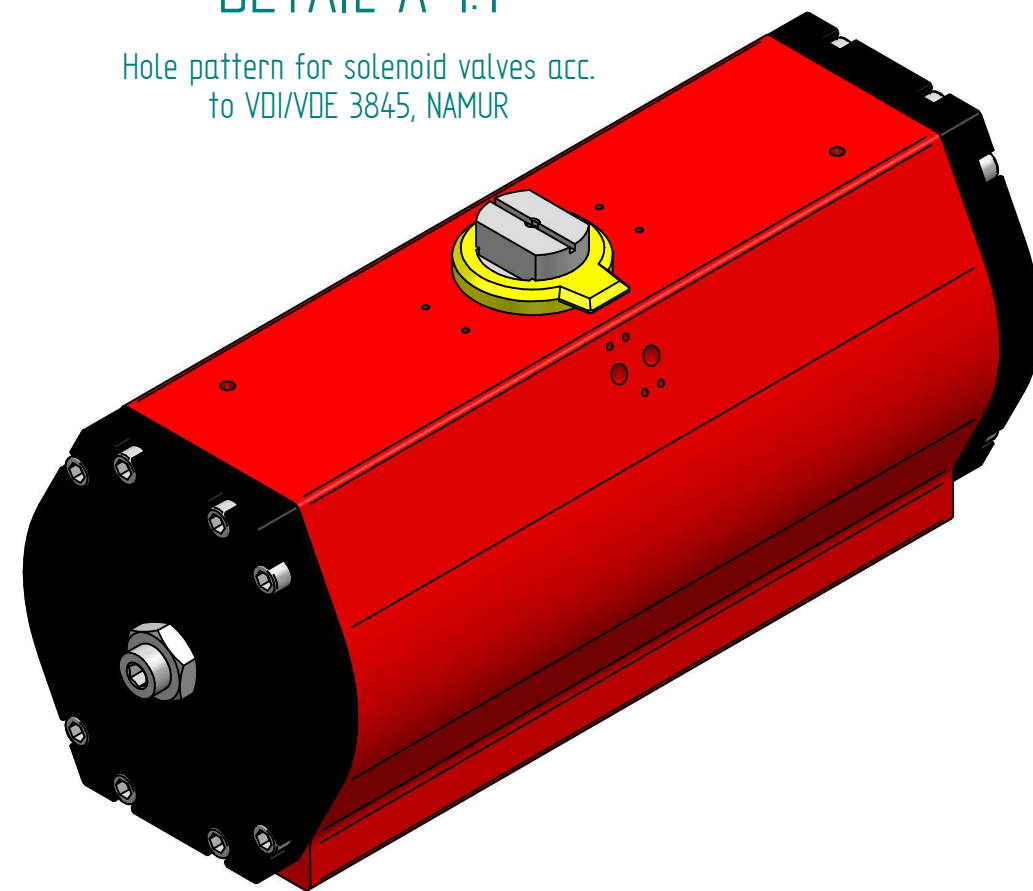

		NAME	DATE	SIZE	DWG NO		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE +/-0,5
	DRAWN	MOTO	11.06.2014	A3	REM00008		
	CHECKED	TOCO	dd.mm.yyyy	FILE NAME: REM00008.dft			
	ENG APPR	TOCO	dd.mm.yyyy	SCALE: 1:4	REV:		
TITLE	PNEUMATIC DOUBLE ACTING ACTUATOR RC280 DA	MGR APPR	TOCO	dd.mm.yyyy	WEIGHT:	SHEET: 1 OF 1	

REV	DESCRIPTION	DATE	APPROVED
REVISION HISTORY			