


VALVOLA A SFERA – MONOBLOCCO – PASSAGGIO TOTALE – NI/AL BRONZE – ANSI 150

BALL VALVE – 1 PIECE – FULL BORE - NI/AL BRONZE – ANSI 150

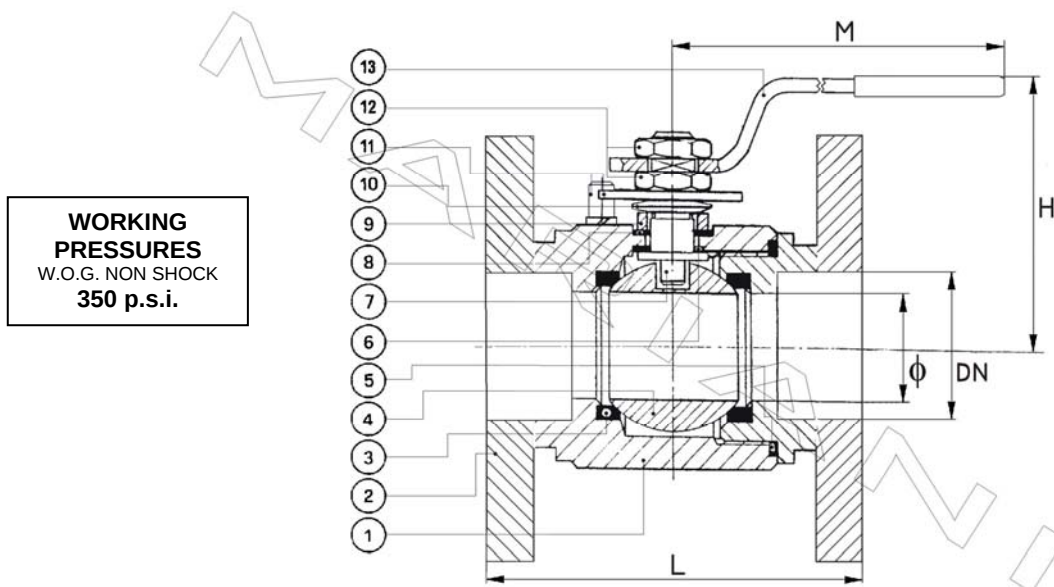

CONFORM TO: LENGHT ANSI B16.10
API STD 6FA / ISO 17292
FIRE SAFE API 607 / BS 6755
MSSP 110

OPTIONAL MATERIAL: ASTM B148 C95800
BS1400 AB2
CB 333G
ASTM B62 C83600

	DESCRIZIONE	DESCRIPTION	AL / BZ	AL / BZ - INOX	AL / BZ - MONEL
1	CORPO	BODY	ASTM B148 C95500	ASTM B148 C95500	ASTM B148 C95500
2	MANICOTTO	END PLUG	ASTM B148 C95500	ASTM B148 C95500	ASTM B148 C95500
3	SEGGIO	SEAT	P.T.F.E.	P.T.F.E.	P.T.F.E.
4	SFERA	BALL	ASTM B148 C95500	ASTM A182 F316	MONEL K500
5	GUARNIZIONE	BODY SEAL	VITON	VITON	VITON
6	SEDE ASTA	STEM SEAT	GRAPHITE TEFLONED	GRAPHITE TEFLONED	GRAPHITE TEFLONED
7	ASTA	STEM	B150 C63200	ASTM A182 F316	MONEL K500
8	GUARNIZIONE	GASKET	GRAPHITE TEFLONED	GRAPHITE TEFLONED	GRAPHITE TEFLONED
9	PREMISTOPPA	THRUST WASHER	ASTM A182 F316	ASTM A182 F316	ASTM A182 F316
10	MOLLE A TAZZA	SPRING DISCS	ASTM A182 F316	ASTM A182 F316	ASTM A182 F316
11	FERMO	STOP	ASTM A182 F316	ASTM A182 F316	ASTM A182 F316
12	DADI	NUTS	ASTM A194 GR.8	ASTM A194 GR.8	ASTM A194 GR.8
13	LEVA	LEVER	ASTM A182 F316	ASTM A182 F316	ASTM A182 F316

FLANGED ENDS: ANSI B16.5 150 FF/RF or DIN 2501 PN 10-16

SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
DN	15	20	25	32	40	50	65	80	100
Ø	15	20	25	30	38	48	65	73	94
L	108	117	127	140	165	178	190	203	229
M	153	186	186	233	233	233	380	380	470
H	75	80	85	100	105	115	130	145	200
Kg	1.95	2.60	3.80	6.50	7.00	10.20	22.50	24.50	40.00